


C3-200

Our secure Web-hosted infrastructure and centralized online administration reduce your IT costs and allow you to easily manage all of your access points in a single location. C3-200 versatile design features take care of present and future needs with ease and efficiency. It is one of the most rugged and reliable controllers on the market, with a multitude of built-in features.

The C3-200 control panel can communicate at 38.4 Kbps via RS-485 configuration or Ethernet TCP/IP networks. It can store up to 30,000 card holders.

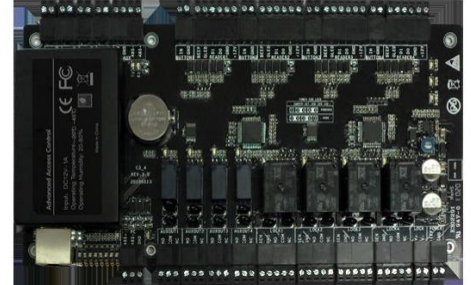

SPECIFICATION

Number of Doors Controlled	2 Door
Number of Readers Supported	4
Types of Readers Supported	26-bit Wiegand, others upon request
Number of Inputs	6 (2 Exit Device, 2 Door Status, 2 AUX)
Number of Outputs	4 (2-Form C Relay for Lock and 2-Form C Relay for Aux Output)
Card Holders Capacity	30,000
Log Events Capacity	100,000
Weight	7.5lbs (3.4kg)
Communication	TCP/IP and RS-485
Enclosure	Powder Coated Aluminum
Mounting	Wall Mount
Recommended Power Supply	12V DC, 1.5A
Dimensions (Bundle Only)	15in.×3.15in.×11in.380mm(L)×80mm(W)×280mm(H)
Dimensions (Board Only)	6.3in.×4.17in.(160mm×106mm)